




LOAD ON PIT FLOOR IS 18KN PRESSURE
IS 87 KN/m² APPLIED TO AREA A

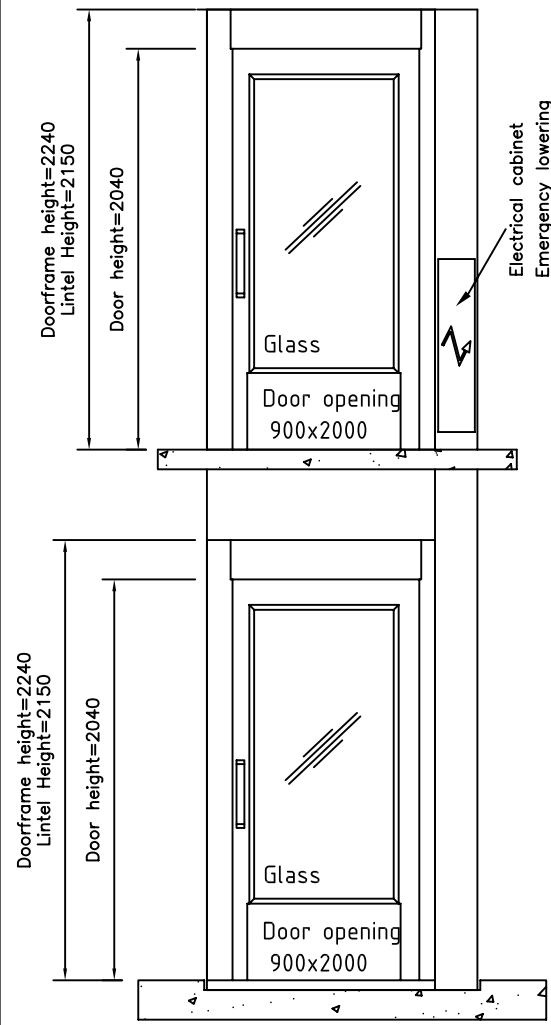


View A

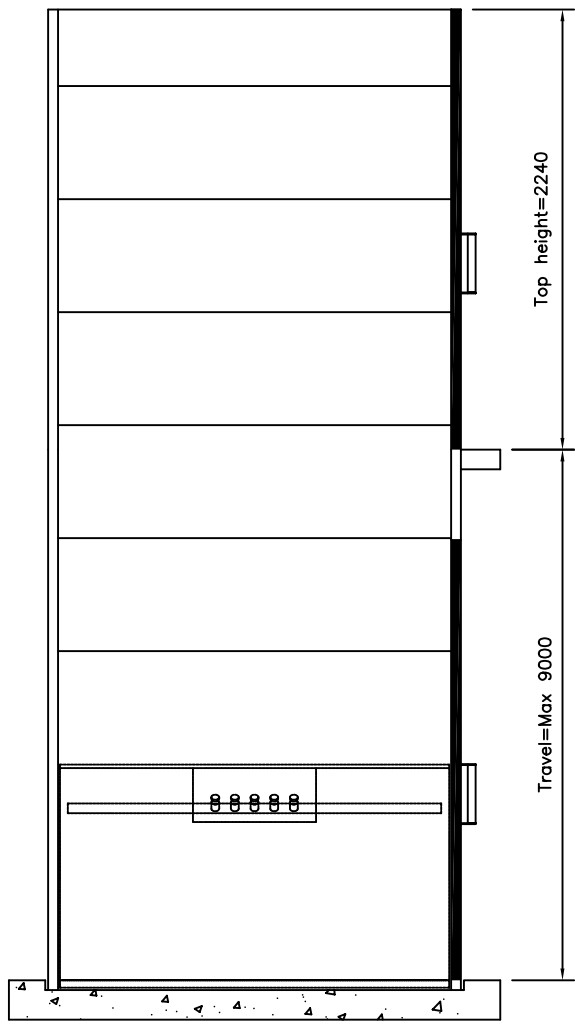

View B

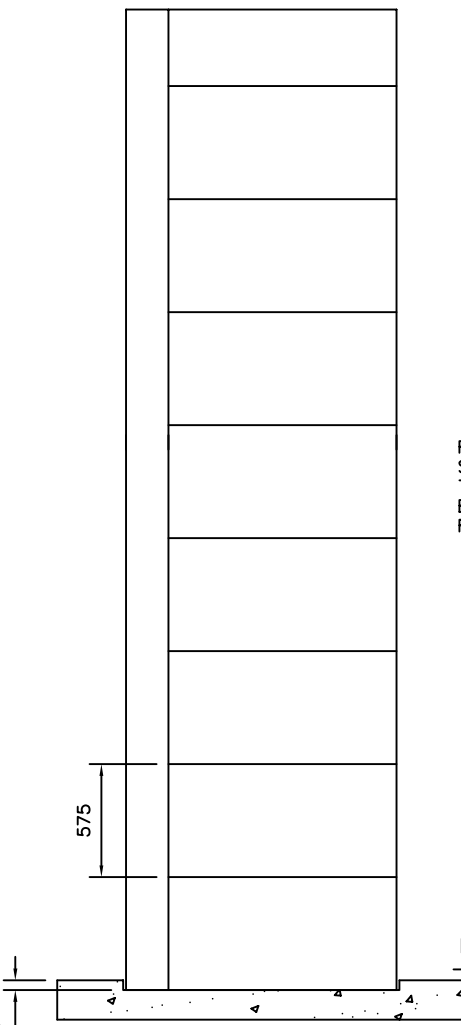


View C

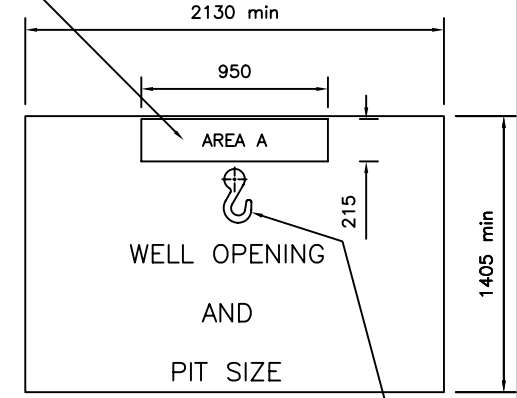

FIXING OF
SUPPORT FRAME
TO THE WALL AT
EACH FLOOR LEVEL
REACTION=2.5KN

LIFTING HOOK
OR BEAM
2300 MM
ABOVE FFL
500 KG SWL

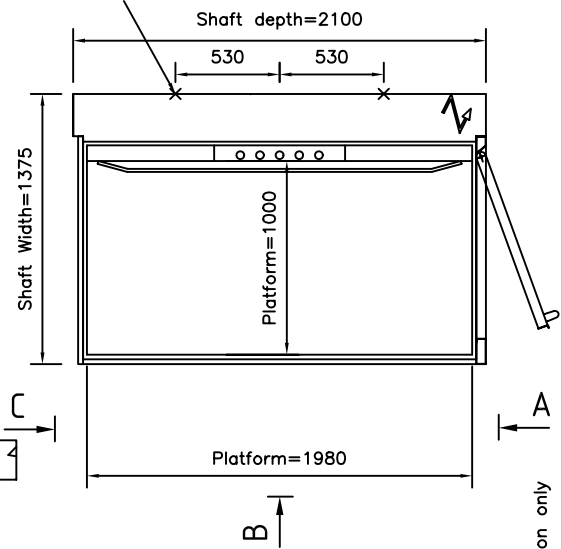

Type	Disabled Access Platform Lift	Supply	400v 3 Phase 50 Hz
Drive	Screw Drive	Running Current	4.7 amps
Rated Load	400 Kg	Starting Current	18 amps
Travel	Maximum of 9.0 metres	Enclosure	Steel Panels RAL 9003
No. of Stops	Maximum of 5 Stops	Door Type	GL Manual
Configuration	Front Opening	Door Fire Rating	None

WORKS BY OTHERS & STRUCTURAL LOADINGS
SEE DRAWING NO. 1122 FOR A GENERAL LIST OF WORKS BY OTHERS.

Issued for information only

BY	DATE	ISSUE	MODIFICATION	CHECKED

PLATFORM LIFT STANDARD LAYOUT
FRONT OPENING WITH 1000 x 1980 PLATFORM STEEL ENCLOSURE

NICHE LIFTS Ltd		DRAWN BY	DATE	CHECKED	SCALE
Do not scale this drawing. All dimensions in millimetres		TMP	31.10.06	FWP	NTS
DRAWING NUMBER		1069/A			