


Specification



1000 x 800 mm Platform
 Front Access
 Rated load 225 kg
 Speed 0.1 m/s
 Supply: Single phase 220 VAC
 Carriage Colour: RAL 7035
 Rail finish anodized aluminum
 Wall Mounted
 20–50 degree stair angle
 Electrical components rated to IP65
 Control units at both landings incorporate
 Up/Down, barrier and platform position
 constant pressure controls.

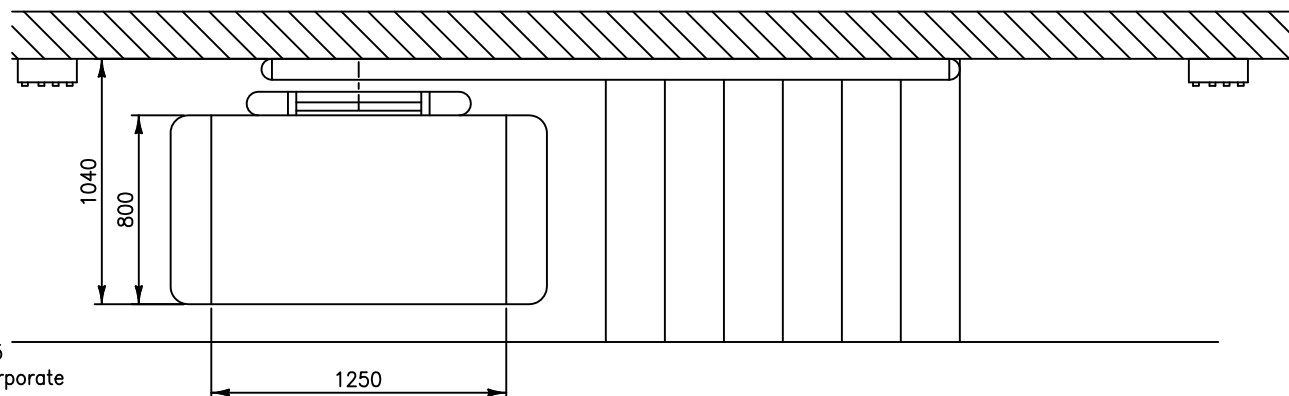

Notes

Others to ensure that the fixing wall can
 withstand the loads from the platform
 lift.
 Others to supply a 13 amp RCD
 protected socket outlet at the top landing
 below our control unit for the platform
 lift supply.
 All wiring to the control units to be
 surface mounted.

FIXING RAIL REACTIONS

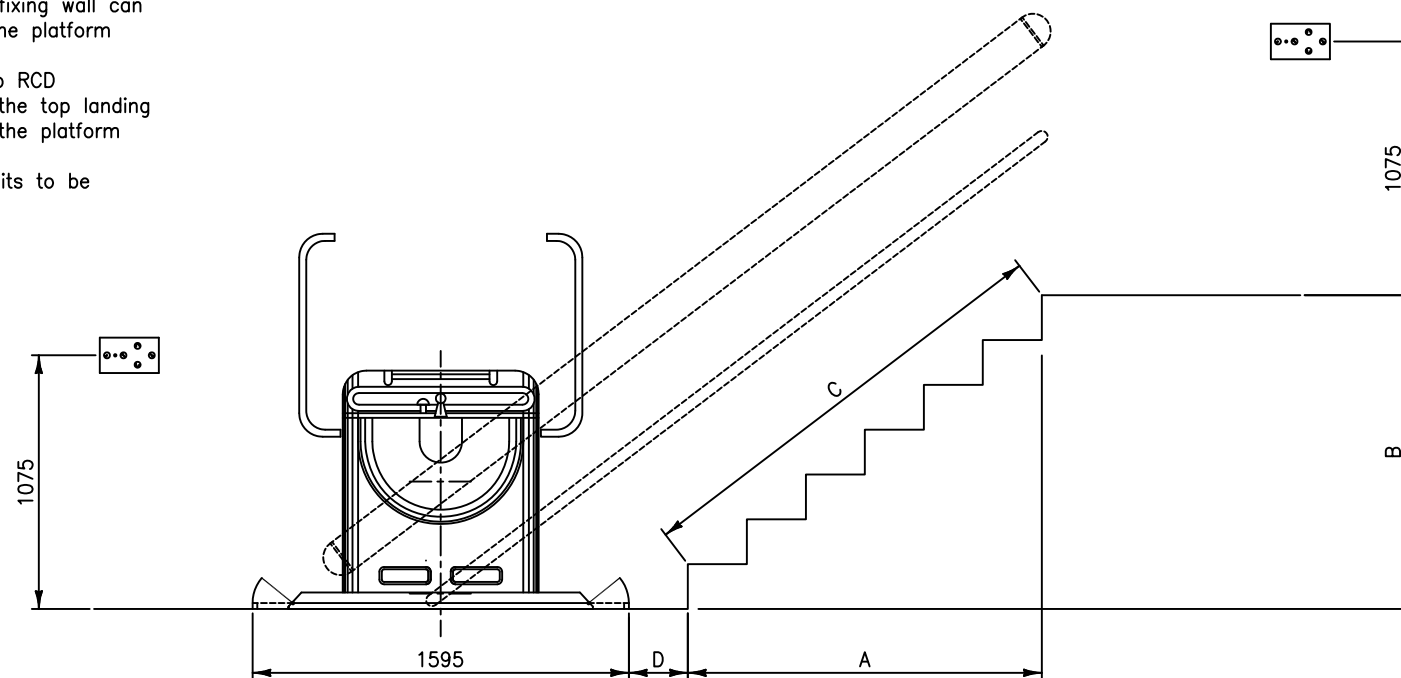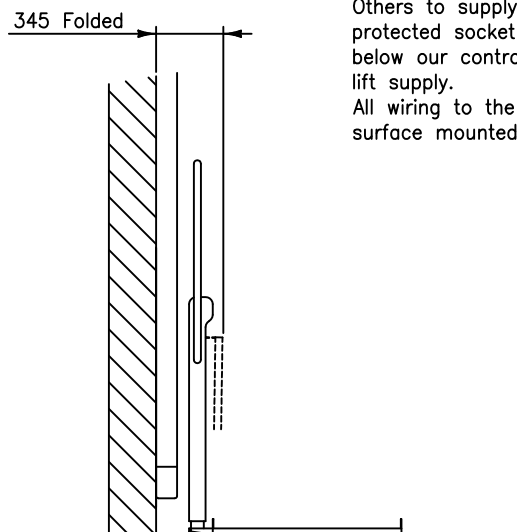

Issued for information only
 Do Not Use for Construction

BY	DATE	ISSUE	MODIFICATION	CHECKED
TMP	30.11.18	B	Redrawn	

INCLINED PLATFORM LIFT 1250 X 800 PLATFORM GENERAL ARRANGEMENT LEFT HAND

NICHE LIFTS Ltd

Do not scale this drawing. All dimensions
 in millimetres

DRAWN BY	DATE	CHECKED	SCALE
TMP	3.5.07		1:25

DRAWING NUMBER

1180/B

NICHE LIFTS LTD Office 15 & 16, 12 Farwig Lane, Bromley, Kent. BR1 3RB Tel: 020 8295 2852 Fax: 020 8466 1695
 e-mail: contracts@nichelifts.com Web Site: www.nichelifts.com