

Vertical Enclosed Platform Lift



- **Part M compliant**
- **Up to 9 metres travel**
- **Shaft enclosure**
- **No pit required**
- **Low running and service costs**
- **Various door arrangements**
- **Fast delivery & installation**

Niche..... Our passion and purpose is the supply of specialist lifts that enable wheelchair users and the less able gain access to upper floors and up stairways, plus service, trolley and goods lifts for transporting goods in the range 5kgs to 1000kgs



We supply, install and service Niche products that meet your specific needs.

NICHE LIFTS—Focus and expertise working uniquely for YOU on Niche Products.

Vertical Enclosed Platform Lift

Model Type	Disabled platform lift
Rated Load	Up to 400 kg
Rated Speed	0.15 m/s
Drive Type	Screw driven
Number of Stops	Up to 5 stops
Power Supply	415v, 3 phase, 50hz, 4-wire or 230v, 1 phase 50 Hz
Travel	Up to 9.0 metres
Pit	50mm, if a pit is not available we can supply a ramp
Emergency Alarm	Alarm bell in lift shaft, with option for telephone handset on platform or handsfree autodialer.
Controls	Constant pressure buttons designed for user with reduced mobility on platform and landings. Emergency stop and alarm buttons on car.
Configuration	Single entry or through car or adjacent please see drawings for configurations and platform sizes.
Door Type	GL large glazed door panel as standard, or GD type door with twin glazed panels, or Fire rated door with small vision panel.
Shaft Enclosure	Standard freestanding structure with powder coated finish to RAL 9003.
Platform Flooring	Slip resistant surface.
Sensitive Edges	Fitted around the platform and carriage as a safety feature, which will immediately stop the platform if contact is made.
Handwinding	Easily accessible from outside the lift shaft to move the platform in case of power failure.
Options	Emergency electrical lowering Powered door openers Concealed door closers Shaft ceiling and light Reduced door heights Arrival gongs Voice synthesizer and indicator
Standards	ISO 9386-1 Machinery Directive 98/37/EC Building Regulations Part M (Subject to platform size, layout & specification)
Documentation	Owners guide issued on completion.
Training	Operation demonstrated on completion.

Platform Size	Required Shaft size
1480 mm deep x 1000 mm wide	1630 mm deep x 1405 mm wide
1480mm deep x 1100 mm wide	1630 mm deep x 1505 mm wide
1480 mm deep x 900 mm wide	1630 mm deep x 1305 mm wide
1280 mm deep x 1000 mm wide	1430 mm deep x 1405 mm wide
1980 mm deep x 1000 mm wide	2130 mm deep x 1405 mm wide

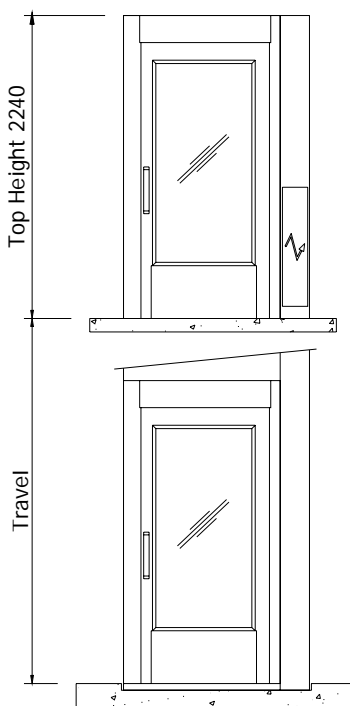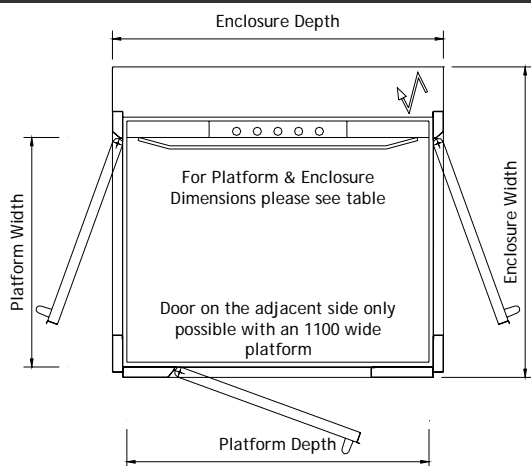

Lifts
NICHE

Niche Lifts Ltd
82 St Georges Road West
Bromley
Kent
BR1 2NP

Tel 020 8295 2852
Fax 020 8467 1044

www.nichelifts.com

Configure your lift on-line at www.nichelifts.com

The information contained in this brochure was correct at the time of printing, due to continued development of our products we reserve the right to change the specification without prior notice